


PSTGO-1650SF

Unity Gain UAV Antenna 1625-1725 MHz

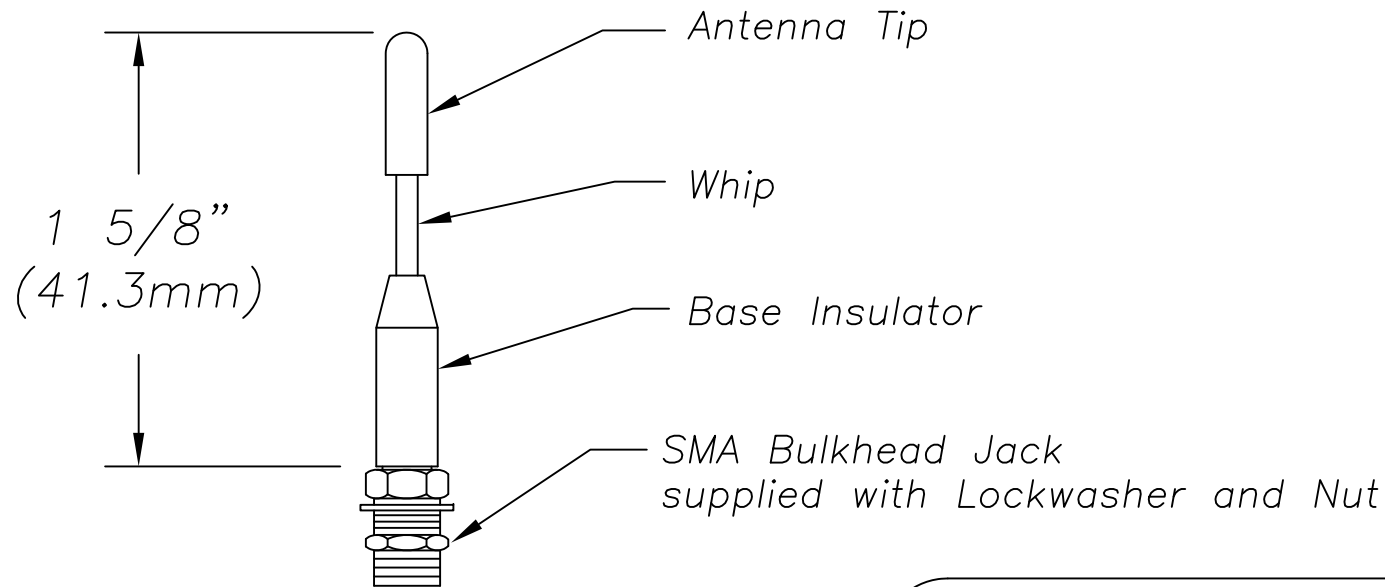

Antenna Specifications:

Frequency: ————— 1635–1725 MHz

Gain: ————— 0 dBi Maximum

VSWR: ————— < 2:1 VSWR across
frequency range

Connector/Interface: — SMA Jack Bulkhead

Radome Material: — Polyurethane

Polorization: ————— Vertical

Impedance: ————— 50 OHM Nominal

Electrical Length: ————— 1/4 wave

Mounting: ————— Fits #10 (.201) (5.1mm) Hole.
3" (76.2mm) Ground Pland Recommended

MobileMark
antenna solutions

US OFFICE & HEADQUARTERS: 1140 W THORNDALE AVE. ITASCA, IL 60143
TEL: (847) 671-6690 * FAX (847) 250-5120

UK OFFICE: 8 MIRAS BUS PARK, KEYS PARK ROAD. HEDNESFORD WS12 2FS, UK.
UK TEL: (+44) 1543-459555 FAX (+44) 1543-459545

VISIT OUR WEBSITE AT WWW.MOBILEMARK.COM

JP 2/4/16 A