# **RGPS-92222GCP-NP Series**

Industrial 26-port managed Gigabit PoE Ethernet switch with **▶** 22x10/100/1000Base-T(X) P.S.E., 2xGigabit combo P.S.E. and 2x100/1000Base-X, SFP socket

#### **Features**

- Support O-Ring (recovery time < 30ms over 250 units of connection) and MSTP(RSTP/STP compatible) for Ethernet Redundancy
- **Open-Ring** support the other vendor's ring technology in open architecture
- **0-Chain** allow multiple redundant network rings
- Support standard IEC 62439-2 MRP (Media Redundancy Protocol) function
- 24 port P.S.E. fully compliant with IEEE802.3at standard, provide up to 30 Watts per port
- Support PoE on/off scheduled configuration
- Support PoE alive check and auto reboot fuction
- Support IPV6 new internet protocol version
- Support Modbus TCP protocol
- Support IEEE 802.3az Energy-Efficient Ethernet technology
- Provided HTTPS/SSH protocol to enhance network security
- Support SMTP client and NTP server protocol
- Support IP-based bandwidth management
- Support application-based QoS management
- Support Device Binding security function
- Support DOS/DDOS auto prevention
- IGMP v2/v3 (IGMP snooping support) for filtering multicast traffic
- Support SNMP v1/v2c/v3 & RMON & 802.1Q VLAN Network Management
- Support ACL, TACACS+ and 802.1x User Authentication for security
- Support 9.6K Bytes Jumbo Frame
- Support full/half-duplex transmission
- SFP socket support DDM function
- Multiple notification for warning of unexpected event
- Support **DBU-01** backup unit device to quickly backup/restore configuration
- Web-based ,Telnet, Console (CLI), and Windows utility (Open-Vision) configuration
- Support LLDP Protocol
- 19 inches rack mountable design


















#### Introduction

RGPS-92222GCP-NP series are Gigabit managed redundant ring PoE Ethernet switch with 22x10/100/1000Base-T(X) IEEE802.3at P.S.E. ports and 2xGigabit combo IEEE802.3at P.S.E. ports and 2x100/1000Base–X SFP ports. These switches support Ethernet Redundancy protocol, **0-Ring** (recovery time < 30ms over 250 units of connection) and MSTP (RSTP/STP compatible) can protect your mission-critical applications from network interruptions or temporary malfunctions with its fast recovery technology. RGPS-92222GCP-NP series also support Power over Ethernet, a system to transmit electrical power up to 30 watts, along with data, to remote devices over standard twisted-pair cable in an Ethernet network. Each RGPS-92222GCP-NP switch has (22+2) x10/100/1000Base-T(X) P.S.E. (Power Sourcing Equipment) ports. P.S.E. is a device (switch or hub for instance) that will provide power in a PoE connection. RGPS-9222GCP-NP series can also be managed centralized and convenient by Open-Vision, Except the Web-based interface, Telnet and console (CLI) configuration. Therefore, the switch is one of the most reliable choice for highly-managed and Fiber PoE Ethernet application.

- **O-Ring**: O-Ring is ORing's proprietary redundant ring technology, with recovery time of less 30 milliseconds and up to 250 nodes. The O-Ring r edundant ring technology can protect mission-critical application from network interruptions or temporary malfunction with its fast recover technology.
- **Open-Ring**: Open-Ring is an enhanced redundant technology that makes ORing's switches compatible with other vendor's proprietary redundant ring technologies. It enables ORing's switches to form a single ring with other vendor's switch. In cases where the ring is setup using proprietary technology, ORing offers a compatibility service where ORing can make its switches compatible with your particular network requirements.
- **O-Chain**: O-Chain is the revolutionary network redundancy technology that provides the add-on network redundancy topology for any backbone network, O-Chain allows multiple redundant network rings of different redundancy protocols to join and function together as a larger and more robust compound network topology. O-Chain providing ease-of-use while maximizing fault-recovery swiftness, flexibility, compatibility, and cost-effectiveness in one set of network redundancy topology.
- MRP: Media Redundancy Protocol (MRP) is a data network protocol standardized by the IEC 62439–2. It allows rings of Ethernet switches to overcome any single failure with recovery time much faster than achievable with Spanning Tree Protocol.
- **IP-based Bandwidth Management**: The switch provide advanced IP-based bandwidth management which can limit the maximum bandwidth for each IP device. User can configure IP camera and NVR with more bandwidth and limit other device bandwidth.
- **Application-Based QoS**: The switch also support application-based QoS. Application-based QoS can set highest priority for data stream according to TCP/UDP port number.
- **Device Binding Function**: ORing special Device Binding function can only permit allowed IP address with MAC address to access the network.

  Hacker cannot access the IP surveillance network without permission. It can avoid hacker from stealing video privacy data and attacking IP camera,


  NVR and controllers.
- Advanced DOS/DDOS Auto Prevention: The switch also provided advanced DOS/DDOS auto prevention. If there is any IP flow become big in
  short time, the switch will lock the source IP address for certain time to prevent the attack. It's hardware based prevention so it can prevent DOS/DDOS
  attack immediately and completely.
- **Modbus TCP**: This is a Modbus variant used for communications over TCP/IP networks.
- **IEEE 802.3az Energy-Efficient Ethernet**: This is a set of enhancements to the twisted-pair and backplane Ethernet family of networking standards that will allow for less power consumption during periods of low data activity. The intention was to reduce power consumption by 50% or more.

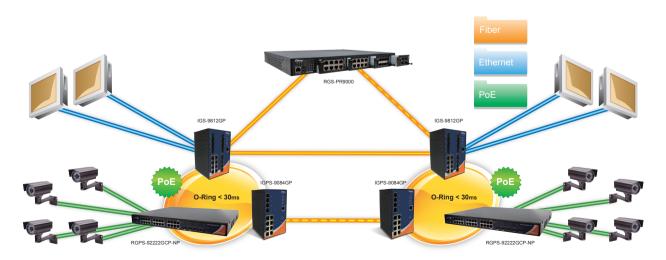



Network connection

## **Open-Vision**

ORing's switches are intelligent switches. Different from other traditional redundant switches, ORing provides a set of Windows utility (Open-Vision) for user to manage and monitor all of industrial Ethernet switches on the industrial network.

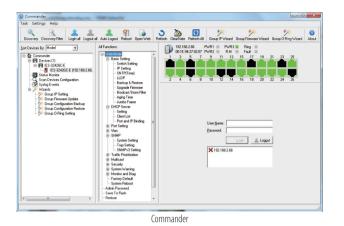

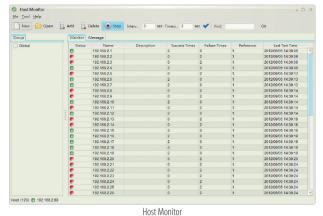

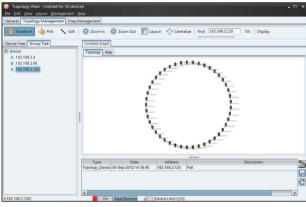


Topology View

### **PoE Pin Definition**

10/100Base-T(X) P.S.E. RJ-45 Port		
RJ-45 Pin Definition		
Pin No.	Description	
#1	TD+ with PoE Power input +	
#2	TD- with PoE Power input +	
#3	RD+ with PoE Power input -	
#6	RD- with PoE Power input -	

1000Base-T P.S.E. RJ-45 Port			
RJ-45 Pin Definition			
Pin No.	Description		
#1	BI_DA+ with PoE Power input +		
#2	BI_DA- with PoE Power input +		
#3	BI_DB+ with PoE Power input -		
#4	BI_DC+		
#5	BI_DC-		
#6	BI_DB- with PoE Power input -		
#7	BI_DD+		
#8	BI_DD-		

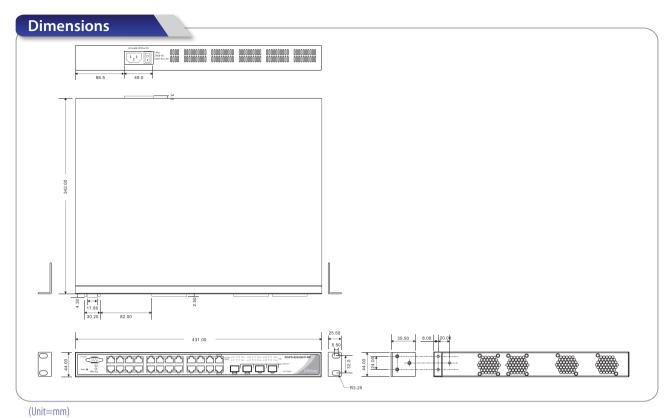


# Specifications

ORing Switch Model	RGPS-92222GCP-NP-LP	RGPS-92222GCP-NP-P	RGPS-92222GCP-NP
Physical Ports			
10/100/1000Base-T(X) with P.S.E. Ports in RJ45 Auto MDI/MDIX		22	
Gigabit Combo port with 10/100/1000Base-T(X)P.S.E. and 100/1000Base-X SFP ports	2		
100/1000Base-X with SFP port	2		
Technology			
Ethernet standards	RGPS-92222GCP-NP-P: Total power	Control Protocol )  ee Protocol) Tree Protocol)  ery Protocol) Vatts per port for P.S.E.) er budget is 320Watts with maximum	power supply spec
MAC table	8K		
Priority queues	8		
Processing	Store-and-Forward		
Switch properties	Switching latency: 7 us Max. Number of Available VLANs: 4095 IGMP multicast groups: 256 for each VLA		o 4094 Define
Switch properties	Switching latency: 7 us Max. Number of Available VLANs: 4095 IGMP multicast groups: 256 for each VLA	Switching bandwidth: 5 VLAN ID Range : VID 1 t N Port rate limiting: User I	o 4094
Jumbo frame	Up to 9.6K Bytes		

Security features	Device Binding security feature Enable/disable ports, MAC based port Port based network access control (80 Single 802.1x and Multiple 802.1x MAC-based authentication QoS assignment Guest VLAN MAC address limit TACACS+ VLAN (802.1Q) to segregate and secu Radius centralized password manager SNMPv3 encrypted authentication and Https / SSH enhance network security Web and CLI authentication and author Authorization (15 levels) IP source guard	re network traffic nent d access security	
Software features		e traffic	
Network redundancy	O-Ring Open-Ring O-Chain MRP MSTP (RSTP/STP compatible)		
RS-232 Serial Console Port	RS-232 in DB-9 connector with conso	le cable. 115200bps, 8, N, 1	
LED Indicators			
Power indicator (PWR)	Green: Power indicator		
Tower mulcutor (1 WIII)	Green: Indicates that the system is operating in O-Ring Master mode		
Ring master indicator (R.M.)	Green: Indicates that the system is ope	rating in O-Ring Master mode	
· ,	Green : Indicates that the system is ope Green : Indicates that the system oper Green Blinking : Indicates that the Rin	ating in O-Ring mode	
Ring master indicator (R.M.)	Green : Indicates that the system oper Green Blinking : Indicates that the Rin Amber : Indicate unexpected event oc	ating in O-Ring mode g is broken. curred	
Ring master indicator (R.M.)  O-Ring Indicator (Ring)	Green : Indicates that the system oper Green Blinking : Indicates that the Rin	ating in O-Ring mode g is broken. curred	
Ring master indicator (R.M.)  O-Ring Indicator (Ring)  Fault Indicator (Fault)	Green : Indicates that the system oper Green Blinking : Indicates that the Rin Amber : Indicate unexpected event oc Dual color LED for Speed/Link/Act ind Green : 1000Mbps Link/Act	ating in O-Ring mode g is broken. curred	
Ring master indicator (R.M.)  O-Ring Indicator (Ring)  Fault Indicator (Fault)  10/100/1000Base-T(X) RJ45 Port Indicator	Green : Indicates that the system oper Green Blinking : Indicates that the Rin Amber : Indicate unexpected event oc Dual color LED for Speed/Link/Act ind Green : 1000Mbps Link/Act Amber : 10/100Mbps Link/Act	ating in O-Ring mode g is broken. curred	
Ring master indicator (R.M.)  O-Ring Indicator (Ring)  Fault Indicator (Fault)  10/100/1000Base-T(X) RJ45 Port Indicator  100/1000Base-X SFP Port Indicator	Green : Indicates that the system oper Green Blinking : Indicates that the Rin Amber : Indicate unexpected event oc Dual color LED for Speed/Link/Act ind Green : 1000Mbps Link/Act Amber : 10/100Mbps Link/Act Green for port Link/Act.	ating in O-Ring mode g is broken. curred	
Ring master indicator (R.M.)  O-Ring Indicator (Ring)  Fault Indicator (Fault)  10/100/1000Base-T(X) RJ45 Port Indicator  100/1000Base-X SFP Port Indicator  PoE Indicator	Green : Indicates that the system oper Green Blinking : Indicates that the Rin Amber : Indicate unexpected event oc Dual color LED for Speed/Link/Act ind Green : 1000Mbps Link/Act Amber : 10/100Mbps Link/Act Green for port Link/Act.	ating in O-Ring mode g is broken. curred	
Ring master indicator (R.M.)  0-Ring Indicator (Ring)  Fault Indicator (Fault)  10/100/1000Base-T(X) RJ45 Port Indicator  100/1000Base-X SFP Port Indicator  PoE Indicator  Fault contact	Green: Indicates that the system oper Green Blinking: Indicates that the Rin Amber: Indicate unexpected event oc Dual color LED for Speed/Link/Act ind Green: 1000Mbps Link/Act Amber: 10/100Mbps Link/Act Green for port Link/Act. Green: PoE enabled LED x 24	ating in O-Ring mode g is broken. curred	
Ring master indicator (R.M.)  O-Ring Indicator (Ring)  Fault Indicator (Fault)  10/100/1000Base-T(X) RJ45 Port Indicator  100/1000Base-X SFP Port Indicator  PoE Indicator  Fault contact  Relay	Green: Indicates that the system oper Green Blinking: Indicates that the Rin Amber: Indicate unexpected event oc Dual color LED for Speed/Link/Act ind Green: 1000Mbps Link/Act Amber: 10/100Mbps Link/Act Green for port Link/Act.  Green: PoE enabled LED x 24  None	ating in O-Ring mode g is broken. curred	50 ~ 57VDC with terminal block
Ring master indicator (R.M.)  O-Ring Indicator (Ring)  Fault Indicator (Fault)  10/100/1000Base-T(X) RJ45 Port Indicator  100/1000Base-X SFP Port Indicator  PoE Indicator  Fault contact  Relay  Power	Green: Indicates that the system oper Green Blinking: Indicates that the Rin Amber: Indicate unexpected event oc Dual color LED for Speed/Link/Act ind Green: 1000Mbps Link/Act Amber: 10/100Mbps Link/Act Green for port Link/Act. Green: PoE enabled LED x 24  None  100~240VAC with power socket 450 Watts power supply included (320W power budget)	ating in O-Ring mode g is broken. curred icator ~  1000 Watts power supply included (720W power budget)	50 ~ 57VDC with terminal block Power supply not include
Ring master indicator (R.M.)  O-Ring Indicator (Ring)  Fault Indicator (Fault)  10/100/1000Base-T(X) RJ45 Port Indicator  100/1000Base-X SFP Port Indicator  PoE Indicator  Fault contact  Relay  Power  Power Input	Green: Indicates that the system oper Green Blinking: Indicates that the Rin Amber: Indicate unexpected event oc Dual color LED for Speed/Link/Act ind Green: 1000Mbps Link/Act Amber: 10/100Mbps Link/Act Green for port Link/Act. Green: PoE enabled LED x 24  None  100~240VAC with power socket 450 Watts power supply included	ating in O-Ring mode g is broken. curred icator ~  1000 Watts power supply included	
Ring master indicator (R.M.)  O-Ring Indicator (Ring)  Fault Indicator (Fault)  10/100/1000Base-T(X) RJ45 Port Indicator  100/1000Base-X SFP Port Indicator  PoE Indicator  Fault contact  Relay  Power  Power Input  Power supply	Green: Indicates that the system oper Green Blinking: Indicates that the Rin Amber: Indicate unexpected event oc Dual color LED for Speed/Link/Act ind Green: 1000Mbps Link/Act Amber: 10/100Mbps Link/Act Green for port Link/Act. Green: PoE enabled LED x 24  None  100~240VAC with power socket 450 Watts power supply included (320W power budget)	ating in O-Ring mode g is broken. curred icator ~  1000 Watts power supply included (720W power budget)	Power supply not include
Ring master indicator (R.M.)  O-Ring Indicator (Ring)  Fault Indicator (Fault)  10/100/1000Base-T(X) RJ45 Port Indicator  100/1000Base-X SFP Port Indicator  PoE Indicator  Fault contact  Relay  Power  Power Input  Power supply  Power consumption (Typ.)	Green: Indicates that the system oper Green Blinking: Indicates that the Rin Amber: Indicate unexpected event oc Dual color LED for Speed/Link/Act ind Green: 1000Mbps Link/Act Amber: 10/100Mbps Link/Act Green for port Link/Act. Green: PoE enabled LED x 24  None  100~240VAC with power socket 450 Watts power supply included (320W power budget) 37 Watts (P.D. not included)	ating in O-Ring mode g is broken. curred icator ~  1000 Watts power supply included (720W power budget)	Power supply not include
Ring master indicator (R.M.)  0-Ring Indicator (Ring)  Fault Indicator (Fault)  10/100/1000Base-T(X) RJ45 Port Indicator  100/1000Base-X SFP Port Indicator  PoE Indicator  Fault contact  Relay  Power  Power Input  Power supply  Power consumption (Typ.)  Overload current protection	Green: Indicates that the system oper Green Blinking: Indicates that the Rin Amber: Indicate unexpected event oc Dual color LED for Speed/Link/Act ind Green: 1000Mbps Link/Act Amber: 10/100Mbps Link/Act Green for port Link/Act. Green: PoE enabled LED x 24  None  100~240VAC with power socket 450 Watts power supply included (320W power budget) 37 Watts (P.D. not included) Present	ating in O-Ring mode g is broken. curred icator ~  1000 Watts power supply included (720W power budget)	Power supply not include
Ring master indicator (R.M.)  0-Ring Indicator (Ring)  Fault Indicator (Fault)  10/100/1000Base-T(X) RJ45 Port Indicator  100/1000Base-X SFP Port Indicator  PoE Indicator  Fault contact  Relay  Power  Power Input  Power supply  Power consumption (Typ.)  Overload current protection  Reverse Polarity Protection	Green: Indicates that the system oper Green Blinking: Indicates that the Rin Amber: Indicate unexpected event oc Dual color LED for Speed/Link/Act ind Green: 1000Mbps Link/Act Amber: 10/100Mbps Link/Act Green for port Link/Act. Green: PoE enabled LED x 24  None  100~240VAC with power socket 450 Watts power supply included (320W power budget) 37 Watts (P.D. not included) Present	ating in O-Ring mode g is broken. curred icator ~  1000 Watts power supply included (720W power budget)	Power supply not include
Ring master indicator (R.M.)  O-Ring Indicator (Ring)  Fault Indicator (Fault)  10/100/1000Base-T(X) RJ45 Port Indicator  100/1000Base-X SFP Port Indicator  PoE Indicator  Fault contact  Relay  Power  Power Input  Power supply  Power consumption (Typ.)  Overload current protection  Reverse Polarity Protection  Physical Characteristics	Green: Indicates that the system oper Green Blinking: Indicates that the Rin Amber: Indicate unexpected event oc Dual color LED for Speed/Link/Act ind Green: 1000Mbps Link/Act Amber: 10/100Mbps Link/Act Green for port Link/Act. Green: PoE enabled LED x 24  None  100~240VAC with power socket 450 Watts power supply included (320W power budget) 37 Watts (P.D. not included) Present Not Present	ating in O-Ring mode g is broken. curred icator ~  1000 Watts power supply included (720W power budget) 37 Watts (P.D. not included)	Power supply not include
Ring master indicator (R.M.)  O-Ring Indicator (Ring)  Fault Indicator (Fault)  10/100/1000Base-T(X) RJ45 Port Indicator  100/1000Base-X SFP Port Indicator  PoE Indicator  Fault contact  Relay  Power  Power Input  Power supply  Power consumption (Typ.)  Overload current protection  Reverse Polarity Protection  Physical Characteristics  Enclosure  Dimensions (W x D x H)  Weight (g)	Green: Indicates that the system oper Green Blinking: Indicates that the Rin Amber: Indicate unexpected event oc Dual color LED for Speed/Link/Act ind Green: 1000Mbps Link/Act Amber: 10/100Mbps Link/Act Green for port Link/Act. Green: PoE enabled LED x 24  None  100~240VAC with power socket 450 Watts power supply included (320W power budget) 37 Watts (P.D. not included) Present Not Present	ating in O-Ring mode g is broken. curred icator ~  1000 Watts power supply included (720W power budget) 37 Watts (P.D. not included)	Power supply not include
Ring master indicator (R.M.)  0-Ring Indicator (Ring)  Fault Indicator (Fault)  10/100/1000Base-T(X) RJ45 Port Indicator  100/1000Base-X SFP Port Indicator  PoE Indicator  Fault contact  Relay  Power  Power Input  Power supply  Power consumption (Typ.)  Overload current protection  Reverse Polarity Protection  Physical Characteristics  Enclosure  Dimensions (W x D x H)	Green: Indicates that the system oper Green Blinking: Indicates that the Rin Amber: Indicate unexpected event oc Dual color IED for Speed/Link/Act ind Green: 1000Mbps Link/Act Amber: 10/100Mbps Link/Act Green for port Link/Act. Green : PoE enabled LED x 24  None  100~240VAC with power socket 450 Watts power supply included (320W power budget) 37 Watts (P.D. not included) Present Not Present  19 inches rack-mountable 431 (W) x 342 (D) x 44 (H) mm (16.9)	ating in O-Ring mode g is broken. curred icator ~  1000 Watts power supply included (720W power budget) 37 Watts (P.D. not included)	Power supply not include  17 Watts (P.D. not included)

Operating Temperature	-40 to 60°C (-40 to 140°F)
Operating Humidity	5% to 95% Non-condensing
Regulatory approvals	
EMI	FCC Part 15, CISPR (EN55022) class A
EMS	EN61000-4-2 (ESD) EN61000-4-3 (RS), EN61000-4-4 (EFT), EN61000-4-5 (Surge), EN61000-4-6 (CS), EN61000-4-8, EN61000-4-11
Shock	IEC60068-2-27
Free Fall	IEC60068-2-32
Vibration	IEC60068-2-6
Safety	EN60950-1
Warranty	5 years

## **Ordering Information**

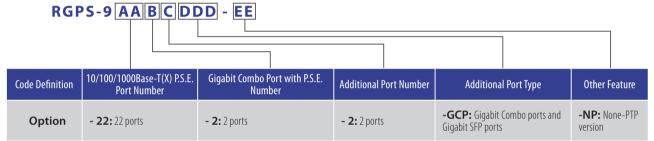

	Model Name	Description	Operating Temperature
Available Model	RGPS-92222GCP-NP-LP_US	Industrial 26-port managed Gigabit PoE Ethernet switch with 22x10/100/1000Base-T( ports and 2x100/1000Base-X, SFP socket, low watts power supply included, US power	
	RGPS-92222GCP-NP-LP_EU	Industrial 26-port managed Gigabit PoE Ethernet switch with 22x10/100/1000Base-T( ports and 2x100/1000Base-X, SFP socket, low watts power supply included, EU power	
	RGPS-92222GCP-NP-LP_UK	Industrial 26-port managed Gigabit PoE Ethernet switch with 22x10/100/1000Base-T(ports and 2x100/1000Base-X, SFP socket, low watts power supply included, UK power	
	RGPS-92222GCP-NP-LP_JP	Industrial 26-port managed Gigabit PoE Ethernet switch with 22x10/100/1000Base-T( ports and 2x100/1000Base-X, SFP socket, low watts power supply included, JP power of the contract of the con	
	RGPS-92222GCP-NP-P_US	Industrial 26-port managed Gigabit PoE Ethernet switch with 22x10/100/1000Base-T(ports and 2x100/1000Base-X, SFP socket, power supply included, US power cord	X) P.S.E., 2xGigabit combo P.S.E.
	RGPS-92222GCP-NP-P_EU	llndustrial 26-port managed Gigabit PoE Ethernet switch with 22x10/100/1000Base-T ports and 2x100/1000Base-X, SFP socket, power supply included, EU power cord	(X) P.S.E., 2xGigabit combo P.S.E.
	RGPS-92222GCP-NP-P_UK	llndustrial 26-port managed Gigabit PoE Ethernet switch with 22x10/100/1000Base-T ports and 2x100/1000Base-X, SFP socket, power supply included, UK power cord	(X) P.S.E., 2xGigabit combo P.S.E.
	RGPS-92222GCP-NP-P_JP	llndustrial 26-port managed Gigabit PoE Ethernet switch with 22x10/100/1000Base-T ports and 2x100/1000Base-X, SFP socket, power supply included, JP power cord	(X) P.S.E., 2xGigabit combo P.S.E.
	RGPS-92222GCP-NP	llndustrial 26-port managed Gigabit PoE Ethernet switch with 22x10/100/1000Base-T ports and 2x100/1000Base-X, SFP socket	(X) P.S.E., 2xGigabit combo P.S.E.
Packing List		Optional Accessories (Can be purchased separately)	

- RGPS-92222GCP-NP/LP/P x 1
- ORing Tool CD x 1
- Quick Installation Guide x 1
- Rack-mount Kit x 1
- Power Cable x 1

- Open-Vision M500: Powerful Network Management Windows Utility Suit, 500 IP devices
   SFP100M series: 100Mbps SFP optical transceiver
- SFP 1G series : 1Gbps SFP optical transceiver
- DBU-01 : backup unit device