TES-3080-M12



▶ Industrial EN50155 8-port managed Ethernet switch with 8x10/100Base-T(X), M12 connector

Features

- Leading EN50155-compliant Ethernet switch for rolling stock application
- Fastest Redundant Ethernet Ring: **O-Ring** (recovery time < 10ms over 250 units of connection)
- **Open-Ring** supports the other vendor's ring technology in open architecture
- **O-RSTP** supports applications with complex topology
- STP/RSTP/MSTP supported
- Supports PTP Client (Precision Time Protocol) clock synchronization
- IGMP v2/v3 (IGMP snooping support) for filtering multicast traffic
- Port Trunking for easy of bandwidth management
- SNMP v1/v2c/v3 support for secured network management
- RMON for traffic monitoring
- Supports LLDP protocol
- Port lock to prevent access from unauthorized MAC address
- Event notification through Syslog, Email, SNMP trap, and Relay Output
- Windows utility (Open-Vision) supports centralized management and configurable by Web-based ,Telnet, and Console (CLI)
- M12 connectors to quarantee reliable operation against environmental disturbances
- Wall mounting enabled


















Introduction

ORing's Transporter series managed Ethernet switches are designed for industrial applications, such as rolling stock, vehicle, and railway applications. The TES-3080-M12 is the managed Redundant Ring Ethernet switch with 8x10/100Base-T(X) ports which is compliant with EN50155 standard. With complete support of Ethernet Redundancy protocol, **O-Ring** (recovery time < 10ms over 250 units of connection), **Open-Ring**, **O-RSTP**, and MSTP/RSTP/STP (IEEE 802.1s/ w/D) can protect your mission-critical applications from network interruptions or temporary malfunctions with its fast recovery technology.


TES-3080-M12 EN50155 Ethernet Switch is specifically designed for the toughest industrial environments. It uses M12 connectors to ensure tight and robust connections, plus it quarantees reliable operation against environmental disturbances, such as vibration and shock. Additionally, the **Open-Ring** technology is also supported which can applied for other vendor's proprietary ring. Network management on TES-3080-M12 is centralized and convenient via the powerful windows utility \sim **Open-Vision**. In addition, the wide operating temperature range from -40°C to 70°C can satisfy most of operating environments. Therefore, the TES-3080-M12 Ethernet switch is one of the most reliable choices for rolling stock and highly-managed Ethernet applications.


Practical Operation

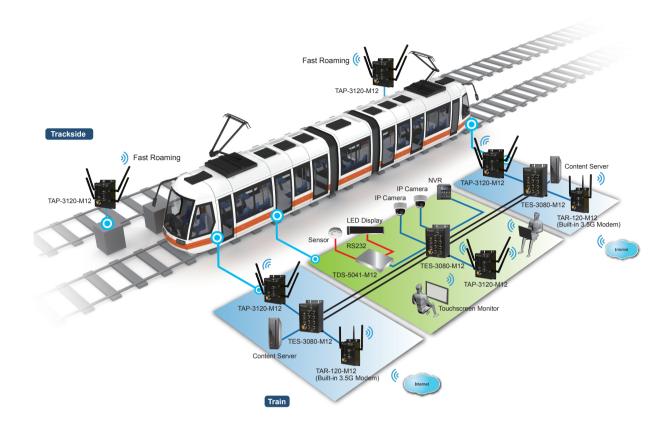


Open-Vision

ORing's switches are intelligent switches. Being different from other traditional redundant switches, ORing provides a set of Windows utility (**Open-Vision**) for users to manage and monitor all of industrial Ethernet switches on the industrial network.

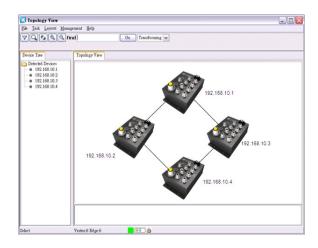

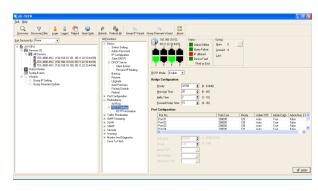

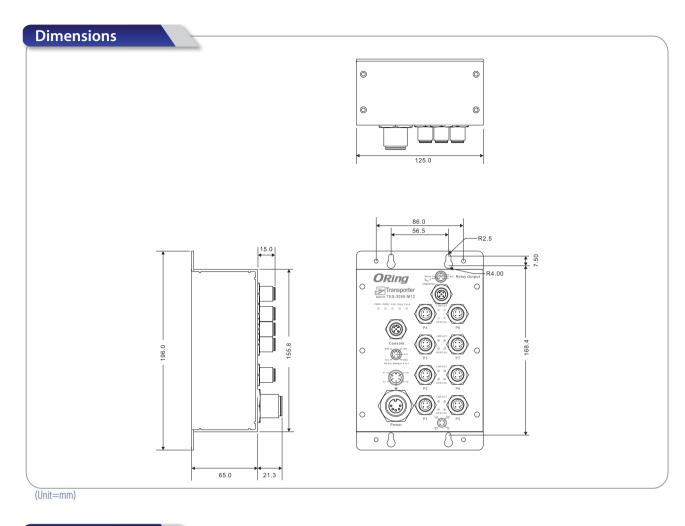

Specifications

ORing Switch Model	TES-3080-M12	
Physical Ports		
10/100 Base-T(X) Ports in M12 (D-coding) Auto MDI/MDIX	8 x M12 connector (D-coding)	
RS-232 Serial Console Port	RS-232 in M12 connector (A-coding). Baud rate setting: 9600bps, 8, N, 1	
Technology		
Ethernet Standards	IEEE 802.3 for 10Base-T IEEE 802.3u for 100Base-TX IEEE 802.3x for Flow control IEEE 802.3ad for LACP (Link Aggregation Control Protocol) IEEE 802.1D for STP (Spanning Tree Protocol) IEEE 802.1p for COS (Class of Service) IEEE 802.1q for VLAN Tagging IEEE 802.1w for RSTP (Rapid Spanning Tree Protocol) IEEE 802.1x for MSTP (Multiple Spanning Tree Protocol) IEEE 802.1x for Authentication IEEE 802.1AB for LLDP (Link Layer Discovery Protocol)	
MAC Table	8192 MAC addresses	
Priority Queues	4	
Processing	Store-and-Forward	
Switch Properties	Switching latency: 7 µs Switching bandwidth: 1.6Gbps Max. Number of Available VLANs: 4096 IGMP multicast groups: 1024 Port rate limiting: User Define	

Security Features	Enable/disable ports, MAC based port security Port based network access control (802.1x) VLAN (802.1Q) to segregate and secure network traffic Supports Q-in-Q VLAN for performance & security to expand the VLAN space Radius centralized password management SNMP v1/v2c/v3 encrypted authentication and access security
Software Features	STP/RSTP/MSTP (IEEE 802.1D/w/s) Redundant Ring (O-Ring) with recovery time less than 10ms over 250 units TOS/Diffserv supported Quality of Service (802.1p) for real-time traffic VLAN (802.10) with VLAN tagging and GVRP supported IGMP Snooping for multicast filtering Port configuration, status, statistics, monitoring, security SNTP for synchronizing of clocks over network Supports PTP Client (Precision Time Protocol) clock synchronization DHCP Server / Client support Port Trunk support MVR (Multicast VLAN Registration) support
Network Redundancy	O-Ring Open-Ring O-RSTP STP RSTP MSTP
Warning / Monitoring System	Relay output for fault event alarming Syslog server / client to record and view events Include SMTP for event warning notification via email Event selection support
LED Indicators	
Power Indicator	Green: Power LED x 2
1 o 11 c 1 11 a 1 c a c o 1	Great Total 225 X 2
R.M. Indicator	Green: Indicates that the system is operating in O-Ring Master mode
R.M. Indicator	Green: Indicates that the system is operating in O-Ring Master mode
R.M. Indicator O-Ring Indicator	Green: Indicates that the system is operating in O-Ring Master mode Green: Indicates that the system is operating in O-Ring mode
R.M. Indicator O-Ring Indicator Fault Indicator	Green: Indicates that the system is operating in O-Ring Master mode Green: Indicates that the system is operating in O-Ring mode Amber: Indicates unexpected event occurred
R.M. Indicator O-Ring Indicator Fault Indicator 10/100Base-T(X) M12 Port Indicator Fault Contact Relay	Green: Indicates that the system is operating in O-Ring Master mode Green: Indicates that the system is operating in O-Ring mode Amber: Indicates unexpected event occurred
R.M. Indicator 0-Ring Indicator Fault Indicator 10/100Base-T(X) M12 Port Indicator Fault Contact Relay Power	Green: Indicates that the system is operating in O-Ring Master mode Green: Indicates that the system is operating in O-Ring mode Amber: Indicates unexpected event occurred Green for port Link/Act. Amber for Duplex/Collision Relay output to carry capacity of 3A at 24VDC(M12 connector with A-coding)
R.M. Indicator O-Ring Indicator Fault Indicator 10/100Base-T(X) M12 Port Indicator Fault Contact Relay Power Redundant Input Power	Green: Indicates that the system is operating in O-Ring Master mode Green: Indicates that the system is operating in O-Ring mode Amber: Indicates unexpected event occurred Green for port Link/Act. Amber for Duplex/Collision Relay output to carry capacity of 3A at 24VDC(M12 connector with A-coding) Dual 12~48VDC on 5-pin M23 connector
R.M. Indicator 0-Ring Indicator Fault Indicator 10/100Base-T(X) M12 Port Indicator Fault Contact Relay Power Redundant Input Power Power Consumption (Typ.)	Green: Indicates that the system is operating in O-Ring Master mode Green: Indicates that the system is operating in O-Ring mode Amber: Indicates unexpected event occurred Green for port Link/Act. Amber for Duplex/Collision Relay output to carry capacity of 3A at 24VDC(M12 connector with A-coding) Dual 12~48VDC on 5-pin M23 connector 5 Watts
R.M. Indicator O-Ring Indicator Fault Indicator 10/100Base-T(X) M12 Port Indicator Fault Contact Relay Power Redundant Input Power Power Consumption (Typ.) Overload Current Protection	Green: Indicates that the system is operating in O-Ring Master mode Green: Indicates that the system is operating in O-Ring mode Amber: Indicates unexpected event occurred Green for port Link/Act. Amber for Duplex/Collision Relay output to carry capacity of 3A at 24VDC(M12 connector with A-coding) Dual 12~48VDC on 5-pin M23 connector 5 Watts Present
R.M. Indicator O-Ring Indicator Fault Indicator 10/100Base-T(X) M12 Port Indicator Fault Contact Relay Power Redundant Input Power Power Consumption (Typ.) Overload Current Protection Reverse Polarity Protection	Green: Indicates that the system is operating in O-Ring Master mode Green: Indicates that the system is operating in O-Ring mode Amber: Indicates unexpected event occurred Green for port Link/Act. Amber for Duplex/Collision Relay output to carry capacity of 3A at 24VDC(M12 connector with A-coding) Dual 12~48VDC on 5-pin M23 connector 5 Watts
R.M. Indicator O-Ring Indicator Fault Indicator 10/100Base-T(X) M12 Port Indicator Fault Contact Relay Power Redundant Input Power Power Consumption (Typ.) Overload Current Protection Reverse Polarity Protection Physical Characteristics	Green: Indicates that the system is operating in O-Ring Master mode Green: Indicates that the system is operating in O-Ring mode Amber: Indicates unexpected event occurred Green for port Link/Act. Amber for Duplex/Collision Relay output to carry capacity of 3A at 24VDC(M12 connector with A-coding) Dual 12~48VDC on 5-pin M23 connector 5 Watts Present Present
R.M. Indicator O-Ring Indicator Fault Indicator 10/100Base-T(X) M12 Port Indicator Fault Contact Relay Power Redundant Input Power Power Consumption (Typ.) Overload Current Protection Reverse Polarity Protection Physical Characteristics Enclosure	Green: Indicates that the system is operating in O-Ring Master mode Green: Indicates that the system is operating in O-Ring mode Amber: Indicates unexpected event occurred Green for port Link/Act. Amber for Duplex/Collision Relay output to carry capacity of 3A at 24VDC(M12 connector with A-coding) Dual 12~48VDC on 5-pin M23 connector 5 Watts Present Present
R.M. Indicator 0-Ring Indicator Fault Indicator 10/100Base-T(X) M12 Port Indicator Fault Contact Relay Power Redundant Input Power Power Consumption (Typ.) Overload Current Protection Reverse Polarity Protection Physical Characteristics Enclosure Dimensions (W x D x H)	Green: Indicates that the system is operating in O-Ring Master mode Green: Indicates that the system is operating in O-Ring mode Amber: Indicates unexpected event occurred Green for port Link/Act. Amber for Duplex/Collision Relay output to carry capacity of 3A at 24VDC(M12 connector with A-coding) Dual 12~48VDC on 5-pin M23 connector 5 Watts Present Present IP-30 125 (W) x 65 (D) x 196 (H)mm (4.92 x 2.56 x 7.72 inch)
R.M. Indicator O-Ring Indicator Fault Indicator 10/100Base-T(X) M12 Port Indicator Fault Contact Relay Power Redundant Input Power Power Consumption (Typ.) Overload Current Protection Reverse Polarity Protection Physical Characteristics Enclosure Dimensions (W x D x H) Weight (g)	Green: Indicates that the system is operating in O-Ring Master mode Green: Indicates that the system is operating in O-Ring mode Amber: Indicates unexpected event occurred Green for port Link/Act. Amber for Duplex/Collision Relay output to carry capacity of 3A at 24VDC(M12 connector with A-coding) Dual 12~48VDC on 5-pin M23 connector 5 Watts Present Present
R.M. Indicator 0-Ring Indicator Fault Indicator 10/100Base-T(X) M12 Port Indicator Fault Contact Relay Power Redundant Input Power Power Consumption (Typ.) Overload Current Protection Reverse Polarity Protection Physical Characteristics Enclosure Dimensions (W x D x H) Weight (g) Environmental	Green: Indicates that the system is operating in O-Ring Master mode Green: Indicates that the system is operating in O-Ring mode Amber: Indicates unexpected event occurred Green for port Link/Act. Amber for Duplex/Collision Relay output to carry capacity of 3A at 24VDC(M12 connector with A-coding) Dual 12~48VDC on 5-pin M23 connector 5 Watts Present Present IP-30 125 (W) x 65 (D) x 196 (H)mm (4.92 x 2.56 x 7.72 inch) 896 g
R.M. Indicator 0-Ring Indicator Fault Indicator 10/100Base-T(X) M12 Port Indicator Fault Contact Relay Power Redundant Input Power Power Consumption (Typ.) Overload Current Protection Reverse Polarity Protection Physical Characteristics Enclosure Dimensions (W x D x H) Weight (g) Environmental Storage Temperature	Green: Indicates that the system is operating in 0-Ring Master mode Green: Indicates that the system is operating in 0-Ring mode Amber: Indicates unexpected event occurred Green for port Link/Act. Amber for Duplex/Collision Relay output to carry capacity of 3A at 24VDC(M12 connector with A-coding) Dual 12~48VDC on 5-pin M23 connector 5 Watts Present Present IP-30 125 (W) x 65 (D) x 196 (H)mm (4.92 x 2.56 x 7.72 inch) 896 g -40 to 85°C (-40 to 185°F)
R.M. Indicator 0-Ring Indicator Fault Indicator 10/100Base-T(X) M12 Port Indicator Fault Contact Relay Power Redundant Input Power Power Consumption (Typ.) Overload Current Protection Reverse Polarity Protection Physical Characteristics Enclosure Dimensions (W x D x H) Weight (g) Environmental	Green: Indicates that the system is operating in O-Ring Master mode Green: Indicates that the system is operating in O-Ring mode Amber: Indicates unexpected event occurred Green for port Link/Act. Amber for Duplex/Collision Relay output to carry capacity of 3A at 24VDC(M12 connector with A-coding) Dual 12~48VDC on 5-pin M23 connector 5 Watts Present Present IP-30 125 (W) x 65 (D) x 196 (H)mm (4.92 x 2.56 x 7.72 inch) 896 g

Regulatory Approvals		
EMI	FCC Part 15, CISPR (EN55022) class A, EN50155 (EN50121-3-2, EN55011, EN50121-4)	
EMS	EN61000-4-2 (ESD), EN61000-4-3 (RS), EN61000-4-4 (EFT), EN61000-4-5 (Surge), EN61000-4-6 (CS), EN61000-4-8, EN61000-4-11	
Shock	IEC60068-2-27, EN61373	
Free Fall	IEC60068-2-32	
Vibration	IEC60068-2-6, EN61373	
Safety	EN60950-1	
Warranty	5 years	

Ordering Information



Code Definition	10/100Base-T(X) Port Number	Additional Port Number
Option	- 08: 8 ports	- 0: 0 port

Available Model TES	Model Name	Description
	TES-3080-M12	EN50155 8-port managed Ethernet switch with 8x10/100Base-T(X), M12 connector
Packing List TES-3080-M12 ORing Tool CD Quick Installation Guide		Optional Accessories (Can be purchased separately) Open-Vision M500, Powerful Network Management Windows Utility Suite, 500 IP devices DR-45 series : 45 Watts DIN-Rail power supply DR-75 series : 75 Watts DIN-Rail power supply DR-120 series : 120 Watts DIN-Rail power supply SDR-240-48, 240W DIN-Rail power supply SDR-480-48, 480W DIN-Rail power supply M12C : M12 cable accessories