

IGCS-E140



IGCS-E140

► Industrial 4-port PCIe unmanaged Gigabit Ethernet switch card with 4x10/100/1000Base-T(X)

Features

- Provide 4x10/100/1000Base-T(X) Ethernet ports
- Supports PCIe x1 bus and compatible x4, x8 and x16 PCIe slots
- Compliant with PCIe Rev.1.1 Interface
- Supports 10K Bytes Jumbo Frame
- Support auto-negotiation and auto-MDI/MDI-X
- Support store and forward transmission
- Support flow control




Introduction


IGCS-E140 is an PCI-Express unmanaged Gigabit Ethernet switch card. The Ethernet switch card is a high performance LAN controller. IGCS-E140 provided 4x10/100/1000Base-T(X) auto MDI/MDIX Ethernet ports. IGCS-E140 could be installed on any IPC motherboard with PCIe socket to make the IPC/ embedded system able to communication with other Ethernet devices. The IGCS-E140's full bandwidth capability boasts a robust 1000Mbps capability through the PCI Express bus architecture. IGCS-E140 no need to purchase a new switch or broadband router because the auto-negotiation feature works with your existing switch, broadband router, or hub to provide the highest network speed available. The automatic full duplex capability further increases bandwidth and eliminates packet collisions by allowing data to flow in both directions at the same time. Therefore, IGCS-E140 is the best solution to IPC/ embedded system to feature Ethernet network.

Practical Operation

IGCS-E140 can be used in connecting several Ethernet devices like IP-Camera or other Ethernet devices.

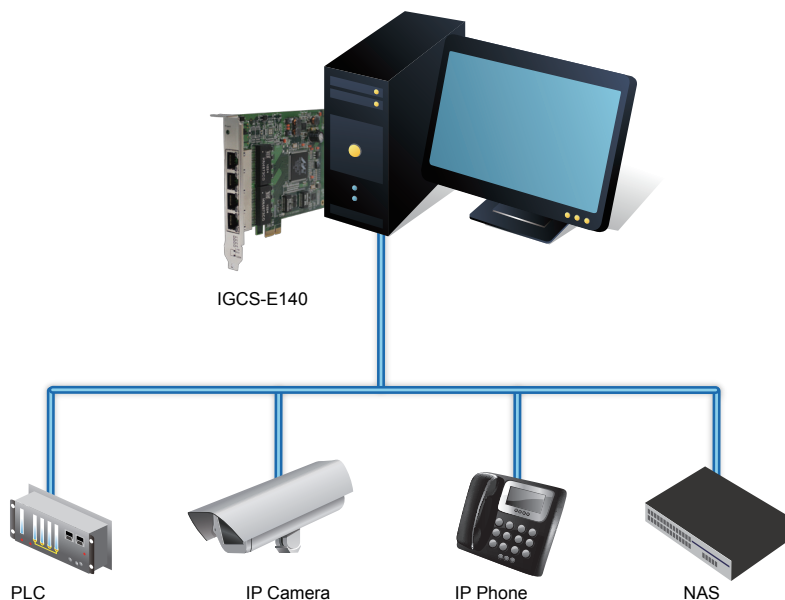

Dimensions

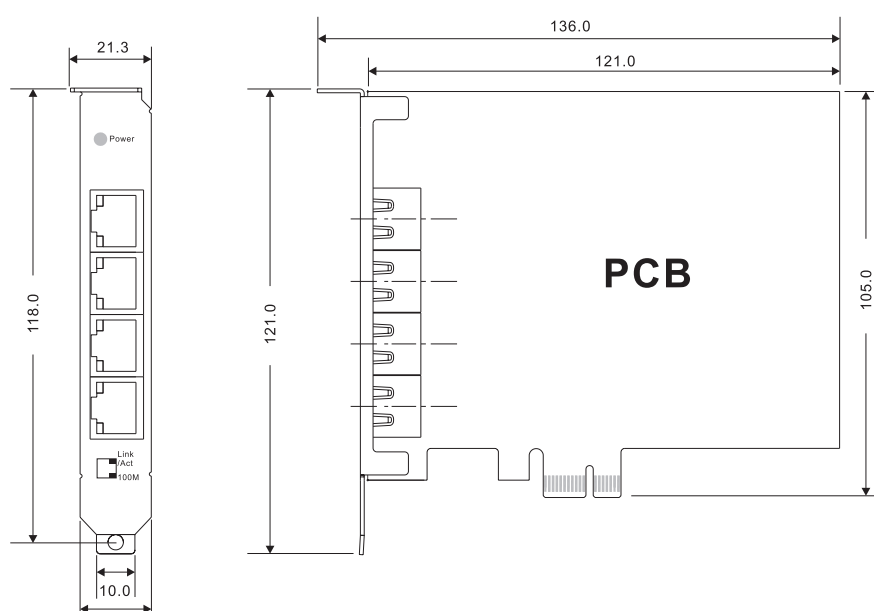

(Unit=mm)

Specifications

| ORing Switch Model | IGCS-E140 |
|--|--|
| Physical Ports | |
| 10/100/1000Base-T(X) Ports in RJ45 | 4 |
| Technology | |
| Ethernet Standards | IEEE 802.3 for 10Base-T IEEE 802.3u for 100Base-TX IEEE 802.3ab for 1000Base-T IEEE 802.3x for Flow control |
| MAC Table | 8K MAC addresses |
| Processing | Store-and-Forward |
| LED Indicators | |
| Power indicator | Green : Power LED x 1 |
| 10/100/1000Base-T(X) RJ45 port indicator | Green for port Link/Act. Amber for 100Mbps indicator |
| Power | |
| Input Power | PCIe bus powered |
| Power Consumption (Typ.) | 4.2 Watts |
| Overload current protection | Present |
| Physical Characteristics | |
| Dimensions (W x D x H) | 21.3 (W) x 136 (D) x 121 (H) mm(0.83 x 5.35 x 4.76 inch) |
| Weight (g) | 98 g |
| Environmental | |
| Operating Temperature | -40 to 85°C (-40 to 185°F) |
| Operating Temperature | -10 to 60°C (14 to 140°F) |
| Operating Humidity | 5% to 95% Non-condensing |

| Regulatory Approvals | |
|---------------------------|--|
| EMI | FCC Part 15, CISPR (EN55022) class A |
| EMS | EN61000-4-2 (ESD), EN61000-4-3 (RS), EN61000-4-4 (EFT), EN61000-4-5 (Surge), EN61000-4-6 (CS), EN61000-4-8, EN61000-4-11 |
| Shock | IEC60068-2-27 |
| Free Fall | IEC60068-2-32 |
| Vibration | IEC60068-2-6 |
| Operating System Supports | |
| Microsoft System | DOS / Win98 / WinMe / WinXP / Win2000 / WinServer2003 / Vista / WinServer 2008 / Win7 / Win8 |
| Unix (Linux) | Linux for Kernel 3.x / 2.6.x / 2.4.x, FreeBSD for 7.x / 8.0, SCO OpenServer for 6 / UnixWare 7.1.x |
| Novell | Novell client for DOS (ODI driver) / Novell server driver (Support OS 5.x and 6.x) |
| Others | MacOS 10.4 / 10.5 / 10.6 / 10.7 |
| Warranty | 5 years |

Ordering Information

IGCS-E1 **AB**

| Code Definition | 10/100B/1000ase-T(X) Port Number | Additional Port Number |
|-----------------|----------------------------------|------------------------|
| Option | - 4 : 4 ports | - 0 : 0 port |

| Available Model | Model Name | Description |
|--|------------|---|
| | IGCS-E140 | Industrial 4-port PCIe unmanaged Gigabit Ethernet switch card with 4x10/100/1000Base-T(X) |
| Packing List <ul style="list-style-type: none"> • IGCS-E140 • Quick Installation Guide • ORing Tool CD | | |