


CLTM101-3Y-WHT-12-SP-440

UHF Ceiling Mount Antenna

420-470 MHz

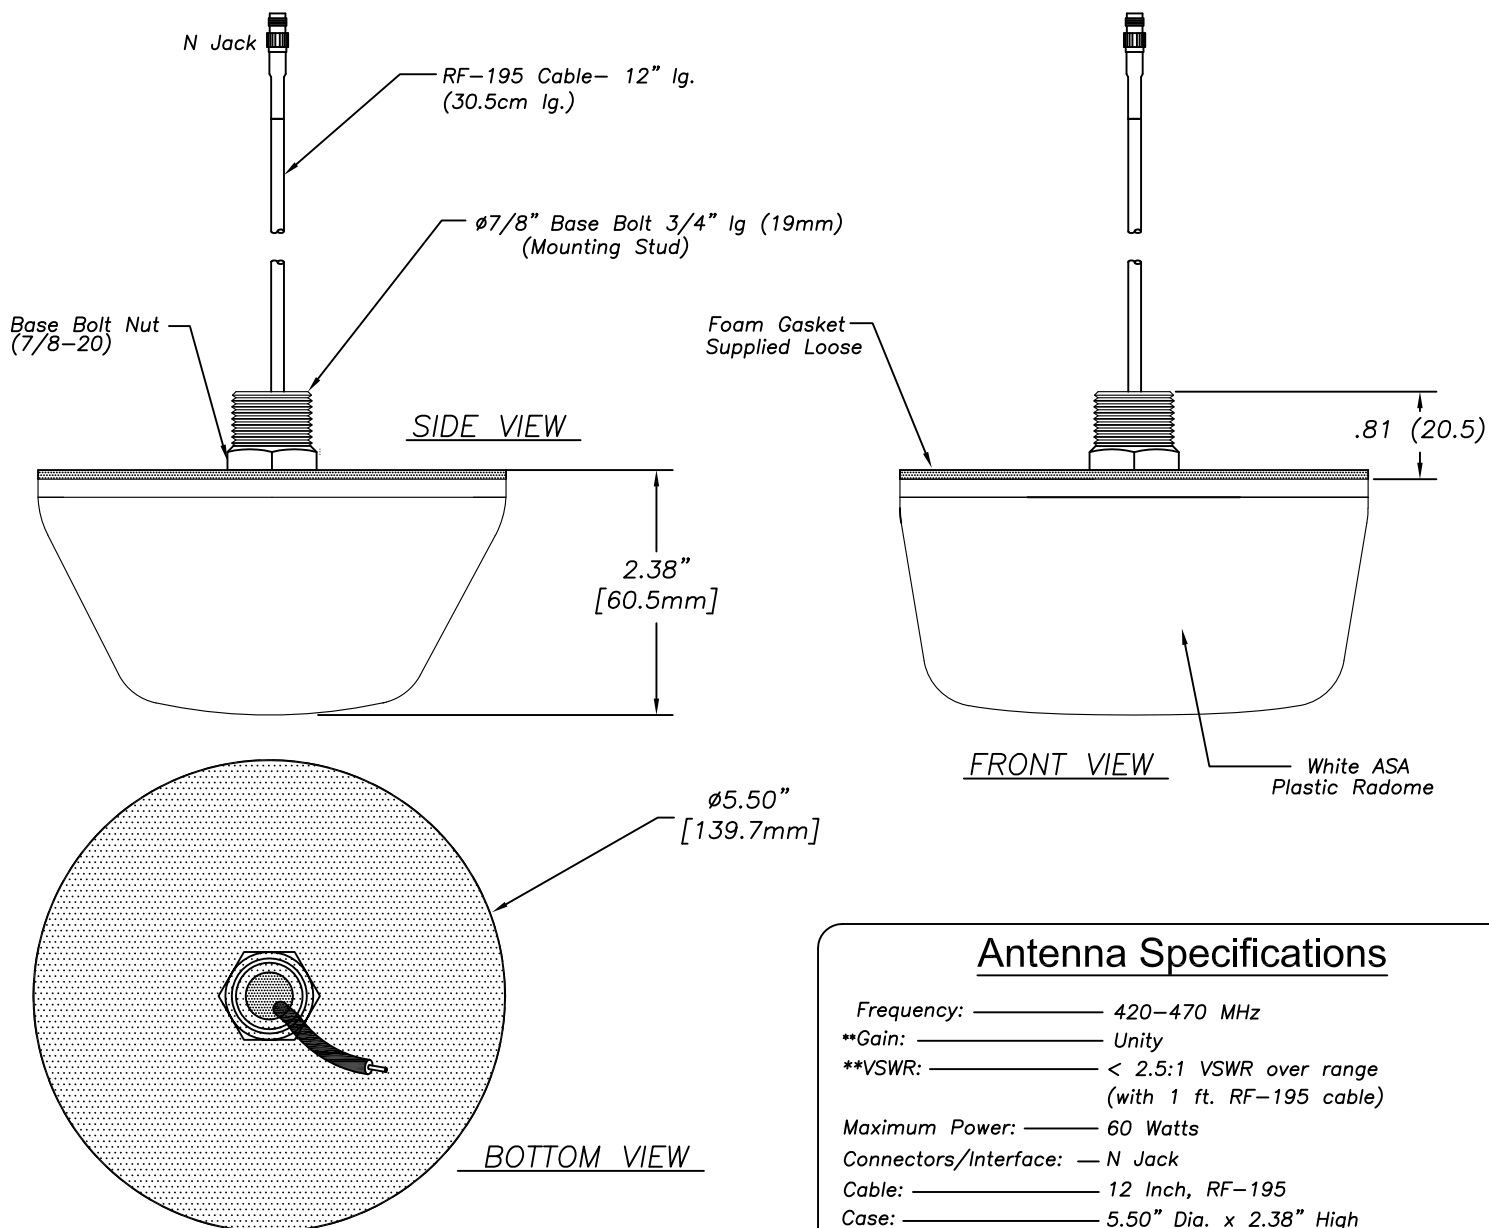

Antenna Specifications

Frequency: ————— 420–470 MHz
 **Gain: ————— Unity
 **VSWR: ————— < 2.5:1 VSWR over range
 (with 1 ft. RF-195 cable)
 Maximum Power: ————— 60 Watts
 Connectors/Interface: — N Jack
 Cable: ————— 12 Inch, RF-195
 Case: ————— 5.50" Dia. x 2.38" High
 Radome Material: ————— ASA (UL 94, IEC60707)
 Impedance: ————— 50 OHM Nominal
 Mounting: ————— 7/8" (22.2mm) Dia. Feed through.
 3/4" lg (19mm). thread for up to
 1/4" (6.4mm) thick surface
 Operating Temperature: —40° to +80° C

** Gain and VSWR measured with 1 ft cable on 1 ft Ground Plane

RP	5/18/16	A
----	---------	---



antenna solutions

US OFFICE & HEADQUARTERS: 1140 W THORNDALE AVE, ITASCA, IL 60143
 TEL: (847) 671-6690 * FAX (847) 250-5120

UK OFFICE: 8 MIRAS BUS PARK, KEYS PARK ROAD, HEDNESFORD WS12 2FS, UK.
 UK TEL: (+44) 1543-459555 FAX (+44) 1543-459545

VISIT OUR WEBSITE AT WWW.MOBILEMARK.COM

